


POSi-TECH

POSI-TAP INSULATED MULTIPLE TAP CONNECTORS




Posi-Tap - Insulated Multiple Tap Connectors

Tap connections and in-line splice/reductions are made quickly and easily with the Posi-tap line of connectors. UL486B listed. Dual-rated AL9CU for any stranded copper or stranded aluminum applications. 600 volt, 90°C.



Single-sided Taps

PART NUMBER	CONDUCTOR RANGE	QTY BOX
CLTS-0402	4 STR - 14 SOL	10
CLTS-0404	4 STR - 14 SOL	5
CLTS-2002	2/0 - 14 SOL	5
CLTS-2004	2/0 - 14 SOL	5



Insulated Splice

CLTB-0200	2 STR. - 14 SOL.	5
CLTB-1000	1/0 STR. - 14 SOL.	5
CLTB-250M	250 MCM - 6 SOL.	2
CLTB-350M	350 MCM - 6 SOL.	2
CLTB-500M	500 MCM - 2 STR.	2


POSI-TECH

POSI-TAP INSULATED MULTIPLE TAP CONNECTORS



Posi-Tap - Insulated Multiple Tap Connectors

Tap connections and in-line splice/reductions are made quickly and easily with the Posi-tap line of connectors. UL486B listed. Dual-rated AL9CU for any stranded copper or stranded aluminum applications. 600 volt, 90°C.

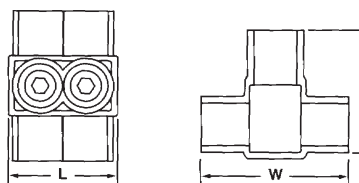

NOW UP TO 600MCM!

2-SIDED ENTRY

PART NUMBER	FIG. NO.	COND.	CONDUCTOR RANGE	QTY BOX
CLTD-0402	2	2	4 STR - 14 SOL	10
CLTD-0404	2	4	4 STR - 14 SOL	5
CLTD-2002	2	2	2/0 - 14 SOL	5
CLTD-2003	2	3	2/0 - 14 SOL	5
CLTD-2004	2	4	2/0 - 14 SOL	5
CLTD-2006	2	6	2/0 - 14 SOL	5
CLTD-25M2	2	2	250 MCM - 10 SOL	5
CLTD-25M3	2	3	250 MCM - 10 SOL	5
CLTD-25M4	2	4	250 MCM - 10 SOL	5
CLTD-25M6	2	6	250 MCM - 10 SOL	3
CLTD-25M8	2	8	250 MCM - 10 SOL	3
CLTD-35M2	2	2	350 MCM - 10 SOL	3
CLTD-35M3	2	3	350 MCM - 10 SOL	5
CLTD-35M4	2	4	350 MCM - 10 SOL	5
CLTD-35M6	2	6	350 MCM - 10 SOL	3
CLTD-35M8	2	8	350 MCM - 10 SOL	3
CLTD-50M2	2	2	600 MCM - 6 SOL	3
CLTD-50M3	2	3	600 MCM - 6 SOL	3
CLTD-50M4	2	4	600 MCM - 6 SOL	3
CLTD-50M6	2	6	600 MCM - 6 SOL	2
CLTD-50M8	2	8	600 MCM - 6 SOL	2